


LSA PROFIL Series 2

Disconnection Module for 2 Mbps Networks

DESCRIPTION


The expansion of mobile communications networks, the introduction of new mobile phone systems (3G, UMTS, 4G, LTE) and the steady growth of IP networks, have created a demand for bandwidth in both access and transmission networks. This in turn causes the extension of existing hubs and the installation of new hubs.

The ADC KRONE PROFIL system provides a foundation for networks served by 2 Mbps copper pairs with impedance of 120 Ohms.

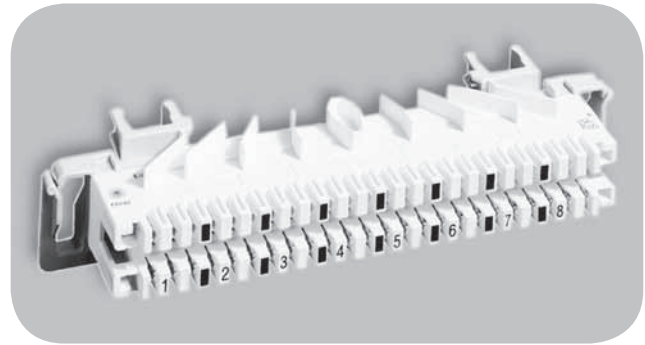

FEATURES & BENEFITS

- Disconnection module for the distribution of eight shielded pairs
- Applications include:
 - Internet backbone
 - GSM networks
 - UMTS networks
- Complies with ITU-T G.703 recommendations (physical/electrical characteristics of hierarchical digital interfaces)
- Category 6-rated NEXT performance
- Compatible with a wide-range of LSA-PLUS Series 2 accessories
- Accessories disconnect only the Line A/Line B contacts, while the shielding remains interconnected. Plugs and cords are available to disconnect the shield, should that be required
- Ports are marked on the module

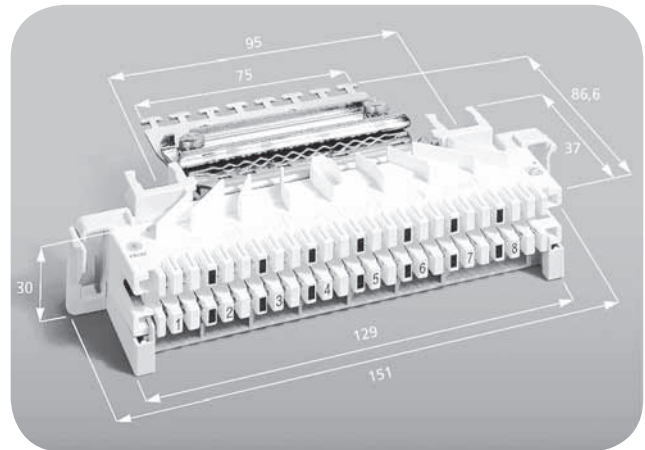

ORDERING INFORMATION

Description	Catalog Number
LSA PROFIL Series 2 8-pair disconnection module for shielded twisted pair	
With left and right jumper guides	7015 1 008-01
Accessories	
Wire guides for jumpers to the left	7015 1 004-50
Wire guides for jumpers to the right	7015 1 005-50
Hinged label holder	7015 1 003-50
Cable support with cable mounting and shield contact for 1 cable with 8 pairs for cable diameter: 12mm	7015 1 009-01
Cable support with cable mounting and shield contact for 8 cables with 1 pair for cable diameter: 3mm	7015 1 009-11
Universal cable support for 1-, 2- and 4-pair cables. Depth: 3-6mm	7015 1 009-21

Note: Delivery unit is multiple of 10 pieces